



SICAM P3 Three-phase Multi-function Power Meter

96x96mm for panel flush mounting

Answers for energy

SIEMENS

SICAM P3 Three Phase Multi-function Power Meter



Overview

SICAM P3 is a three phase electronic multi-function power meter with a LCD screen. It is integrated real time measurement, energy metering, status information, remote control and communication function.

The SICAM P3 meter can be widely used for MV and LV power distribution systems, industrial automation control system, energy management and building power SCADA.

Main Features

The SICAM P3 meter is intended to measure grid parameters, e.g. as voltage, current, power, power factor and frequency, analyze 2-50th harmonics, calculate several power quality data, and measure active and reactive energy. The RS-485 communication port supports MODBUS-RTU communication protocol and has binary input and relay output. For the SICAM P3 meter, 24-bit high-accuracy sampling measurement unit and high-speed MCU data processing unit are used to realize high-precision, wide-range, accurate measurement and rapid data analysis. Segment-code multi-row wide-angle LCD is used to display plenty of contents and is equipped with white back light. Nonvolatile memory is used to store different types of data and ensure data for a long time, and no data in the memory will be lost in the case of power failure.

Reference Standards

- IEC 62053-61
- IEC 62053-22
- IEC 62053-23
- IEC 62052-11
- Modbus-RTU

EMC and Insulation Standards

- Electrostatic discharge test
IEC61000-4-2 level 4
- Fast transient burst test
IEC61000-4-4 level 4
- Surge test
IEC61000-4-5 level 4
- Power frequency magnetic field
IEC61000-4-8 level 4
- Damped oscillatory magnetic field
immunity test
IEC61000-4-10 level 4
- Radio frequency, electromagnetic field immunity test
IEC61000-4-3, level 4
- Dielectric test 2kV
- Impulse voltage test 4kV
- Oscillatory waves immunity test
IEC61000-4-12 level 3

Main Functions

- Voltage and average voltage of each phase
 - Voltage and average phase to phase voltage
 - Each phase current, average current and zero sequence current
 - Total and each phase active power, reactive power and apparent power of each phase
 - Phase angle of voltage and current of each phase
 - Total and each phase power factor of each phase
 - Measurement range of grid frequency: 45-65Hz
 - Combination active energy, supplied and demand active energy
 - Combination reactive and four-quadrant reactive energy
 - Total fundamental active energy and total harmonic active energy
 - Supply and demand active energy of each phase, combination reactive energy of each phase, fundamental active energy and harmonic active energy of each phase
 - Time-of-use price, 6 rates, 14 time periods, 8 daily periods, 14 annual periods, 100 public holidays
 - Effective value and content rate of voltage and current of 2-50th harmonics of each phase
 - Total distortion rate of harmonic voltage and current of each phase
 - MAX & MIN value of voltage, current and power
 - Power, current and energy demand
 - 4 binary inputs, 2 relay output
 - 2 energy (active and reactive) pulse output
 - Range of voltage current transformation ratio: 0.0000-9999.9999
 - 160 sampled points per cycle
 - 6 programmable limit violation alarms
 - RS485 supports Modbus RTU protocol
 - Real-time display of voltage phase failure, inverse phase sequence and communication status on LCD, configurable cyclically displayed items
 - Totally enclosed design with prevention against dust
- Note: Actual functions of the meter depend on product order number.

Technical data

- Connection
Three-phase three-wire, three-phase four-wire, single-phase
- Voltage
Nominal voltage Un: AC380V, AC220V, AC100V, AC57.7V
Measurement range: 10V-264V phase voltage

Power consumption: <0.1VA (single phase @220VAC)

Accuracy: RMS 0.2% Resolution: 0.01V
Maximum measurement range: 400V phase voltage

- Current
Nominal current In: 1A, 5A
Measurement range: 15mA-6A
Power consumption: <0.3VA (single phase @5A)
Accuracy: RMS 0.2% Resolution: 0.001A
Maximum measurement range: 9A
- Power
Accuracy: 0.5%
Resolution: 0.001kW/kVar/kVA
- Frequency
Measurement range: 45-65Hz
Accuracy: 0.2%
Resolution: 0.01Hz
- Harmonic Number: 2-50th Accuracy: 5%
- Active energy
Accuracy class: 0.5S
Resolution: 0.01 kW/h
- Reactive energy
Accuracy class: 2
Resolution: 0.01 kvarh
- Energy pulse output
2 energy (active and reactive) pulse output
Optical coupling isolation 4000VRMS
pulse width 80±20ms
Operating voltage range 5-80VDC
maximum current 10mA
Pulse constant:
5000imp/kwh, 5000imp/kvarh
- Binary output
2 electromagnetic relay output, NO type
Contact capacity: AC 250V/3A, DC 30V/3A
- Binary input
4 dry contact input
Optical coupling isolation 4000VRMS, impedance 1.2kΩ
- RS-485 communication port
Type: two-wire half-duplex
Communication rate: 600bps-38400bps
Protocol: Modbus-RTU
- Operating temperature
-25 °C ~ +60 °C
- Operating temperature limits
-35 °C ~ +70 °C
- Relative humidity
≤95% (no condensate)
- Operating power supply
AC or DC power supply
Maximum input range: 40V-420V
- Power consumption: ≤2W, 4VA
- Dimensions
Appearance dimensions (mm): 96×96×95
Panel cutout (mm): 92×92
Weight: approx. 450g

A digital multimeter with a black casing and a large LCD screen. The screen displays 'U' for voltage, 'E' for energy, and several numerical values. The Siemens logo is visible at the top left of the device.

Name	P38	P37	P36	P35	P32	P31	P30
Technical data (RMS Value)							
Voltage 57.7/100/220/380 VAC	■	■	■	■	—	—	—
Current 1/5 A	■	■	■	■	■	■	■
Frequency	■	■	■	■	—	—	—
Active Power	■	■	■	■	—	—	—
Reactive Power	■	■	■	■	—	—	—
Apparent Power	■	■	■	■	—	—	—
Power Factor	■	■	■	■	—	—	—
Phase Angle	■	■	■	■	—	—	—
Active Energy	■	■	■	■	—	—	—
Reactive Energy	■	■	■	■	—	—	—
Harmonic	■	■	—	—	—	—	—
Current, Power, Energy Demand	■	—	—	—	—	—	—
TOU	■	—	—	—	—	—	—
SOE Event	■	—	—	—	—	—	—
Measurement Accuracy							
Voltage Accuracy	0.2%	0.2%	0.2%	0.2%	—	—	—
Voltage Resolution (V)	0.01	0.01	0.01	0.01	—	—	—
Current Accuracy	0.2%	0.2%	0.2%	0.2%	0.2%	0.2%	0.2%
Current Resolution (A)	0.001	0.001	0.001	0.001	0.001	0.001	0.001
Power Accuracy	0.5%	0.5%	0.5%	0.5%	—	—	—
Power Resolution (kW /kVar/kVA)	0.001	0.001	0.001	0.001	—	—	—
Frequency Range	45 ~ 65Hz	45 ~ 65Hz	45 ~ 65Hz	45 ~ 65Hz	—	—	—
Frequency Accuracy	0.2%	0.2%	0.2%	0.2%	—	—	—
Frequency Resolution (Hz)	0.01	0.01	0.01	0.01	—	—	—
Active Energy (Accuracy Class)	0.5S	0.5S	0.5S	0.5S	—	—	—
Reactive Energy (Accuracy Class)	2S	2S	2S	2S	—	—	—
Energy Resolution (kWh/kVarh)	0.01	0.01	0.01	0.01	—	—	—
Number of Harmonics	2-50	2-50	—	—	—	—	—
Harmonic Accuracy	5%	5%	—	—	—	—	—
Input / Output							
Energy Pulse Output	2	2	2	2	—	—	—
Binary input	4	4	4	—	4	—	—
Relay Output	2	2	2	—	2	—	—
485 Communication Port	2	1	1	1	1	1	—
Others							
Operating Temperature	-25 ℃ ~ +60 ℃						
Storage Temperature	-35 ℃ ~ +70 ℃						
Relative Humidity	<=95%						
Operating Power Supply	40V ~ 420V AC/DC						
Display	LCD						
Dimensions	Appearance Dimensions: 96X96X95 mm; Panel cutout: 92X92 mm						




Name

SICAM P		
Power supply: 40-420 V AC&DC, dimensions: 96*96*95mm		
Functions		
3-phase current, no communication port	3	0
3-phase current, 1 RS485 interface	3	1
3-phase current, 4 BIs, 2 BO, 1 RS485 interface	3	2
3-phase current, 3-phase voltage, power, power factor, frequency, energy, 2 pulse outputs, 1 RS485 interface	3	5
3-phase current, 3-phase voltage, power, power factor, frequency, energy, 2 pulse outputs, 4 BIs, 2 BO, 1 RS485 interface	3	6
3-phase current, 3-phase voltage, power, power factor, frequency, energy, 2 pulse outputs, harmonic, 4 BIs, 2 BOs, 1 RS485 interface	3	7
3-phase current, 3-phase voltage, power, power factor, frequency, energy, 2 pulse outputs, harmonic, demand, TOU, 4 BIs, 2 BOs, 2 RS485 interfaces	3	8


Product Order No.

Name	Order No.
SICAM P30	7KG7331 - 1AA00
SICAM P31	7KG7331 - 1AA01
SICAM P32	7KG7331 - 1AA11
SICAM P35	7KG7331 - 1BA01
SICAM P36	7KG7331 - 1BA11
SICAM P37	7KG7331 - 1HA11
SICAM P38	7KG7331 - 1TA12


Connection Diagrams

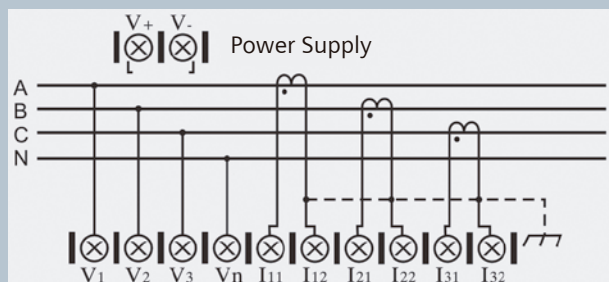

3-phase 4-wire (without PT) Connection Diagram

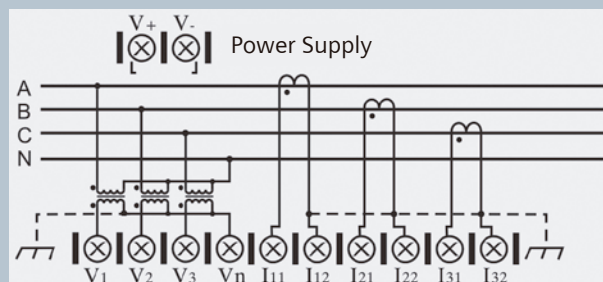

3-phase 4-wire (with PT) Connection Diagram

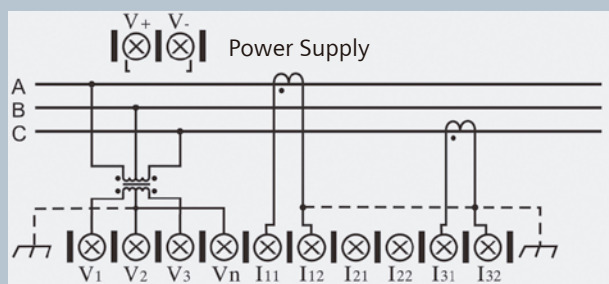

3-phase 3-wire Connection Diagram
(V_n shall be externally short-circuited with V_2)

Connection: 3-phase 3-wire and 3-phase 4-wire self-adaption (automatic decision by phase angle)
Input Current Range: 1.5(6)A
Input Voltage Range: 3X220 / 380V

Back Terminal Diagram

Top Block of Terminals

V+	V-	NC	NC	R11	R12	R21	R22
Power Supply		Reserved	Reserved	Relay 1 Output Terminal		Relay 2 Output Terminal	

Middle Block of Terminals

P+	Q+	COM1	DI1	DI2	DI3	DI4	COM2	A1	B1	A2	B2
Active Pulse Output	Reactive Pulse Output	Common Terminal of Pulse Output	1 st Binary input	2 nd Binary input	3 rd Binary input	4 nd Binary input	Common Terminal of binary input	1 st RS485+	1 st RS485-	2 nd RS485+	2 nd RS485-

Bottom Block of Terminals

V1	V2	V3	Vn	I11	I12	I21	I22	I31	I32
Phase A Voltage	Phase B Voltage	Phase C Voltage	Neutral Terminal	Phase A Current Input	Phase A Current Output	Phase B Current Input	Phase B Current Output	Phase C Current Input	Phase C Current Output

Published by and copyright © 2012:
Siemens AG
Infrastructure & Cities Sector
Smart Grid Division
Energy Automation
Humboldtstr. 59
90459 Nuremberg, Germany
www.siemens.com/powerquality

All rights reserved.

If not stated otherwise on the individual pages of this catalog, we reserve the right to include modifications, especially regarding the stated values, dimensions and weights.

Drawings are not binding.


All product designations used are trademarks or product names of Siemens AG or other suppliers. If not stated otherwise, all dimensions in this catalog are given in mm/inch.

Subject to change without prior notice.

The information in this document contains general descriptions of the technical options available, which may not apply in all cases. The required technical options should therefore be specified in the contract.

NOTE

The device main terminals are barrier terminals which can be connected using fork or ring type lug (no more than 6.5mm wide). For cables to be connected to upper and lower main terminals, cold-pressed UT2.5-3 terminal is recommended before connection. The diagram of connection is below.

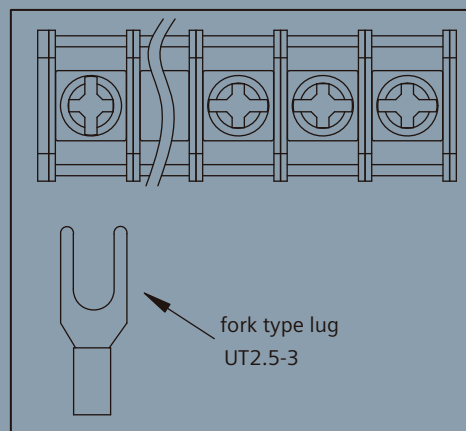

For more information, please contact
our Customer Support Center.

Customer Support Center.

Tel.: +49 180 524 70 00

Fax: +49 180 524 24 71

(Charges depending on provider)

E-mail: support.ic@siemens.com