

SALES & ENGINEERING DATA

RATIO
SERIES: **1:1**


FLUID P.S.I.
RANGE: **10 - 100**

PD03P-XXS-XXX

3/8" NON-METALLIC DIAPHRAGM PUMP

RELEASED: 2-17-06
REVISED: 12-21-06
(REV. 02) S-1386

DIMENSIONAL DATA

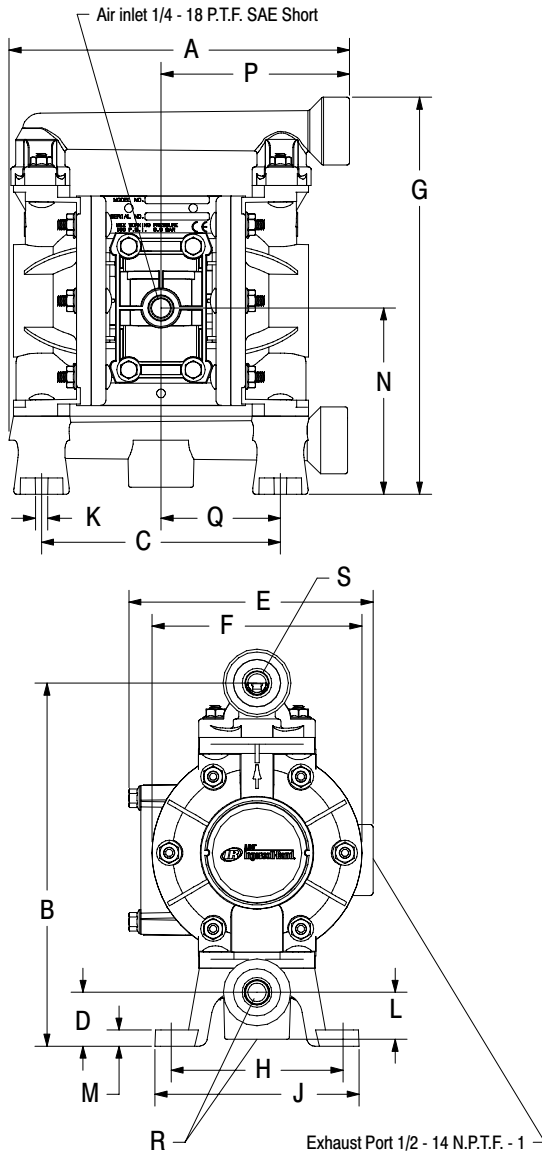

DIMENSIONS

A 7-31/32" (202.3 mm)	F 4-31/32" (125.6 mm)	L 1-3/32" (27.8 mm)
B 8-17/32" (216.1 mm)	G 9-5/16" (236.2 mm)	M 3/8" (9.6 mm)
C 5-5/8" (142.7 mm)	H 4-1/16" (102.7 mm)	N 4-3/8" (111.0 mm)
D 1-9/32" (32.1 mm)	J 4-13/16" (121.9 mm)	P 4-13/32" (110.5 mm)
E 5-23/32" (145.2 mm)	K 9/32" (7.2 mm)	Q 2-13/16" (71.4 mm)

Model	"R" Material Inlet	"S" Material Outlet
PD03P-AXS-XXX	3/8 - 18 N.P.T.F. - 1	3/8 - 18 N.P.T.F. - 1
PD03P-BXS-XXX	Rp 3/8 (3/8 - 19 BSP)	Rp 3/8 (3/8 - 19 BSP)

NOTE: Dimensions are shown in inches and (mm), supplied for reference only and are typically rounded up to the nearest 1/16 inch.

SPECIFICATIONS

CONSTRUCTION

Model Series	PD03P-XXS-XXX
Pump Type	Non-Metallic, Air Operated, Double Diaphragm
Ratio	1:1
Material Inlet / Outlet (female)	
PD03P-AXS-XXX	3/8 - 18 N.P.T.F. - 1
PD03P-BXS-XXX	Rp 3/8 (3/8 - 19 BSP parallel)
Air Inlet (female)	1/4 - 18 P.T.F. SAE short
Air Exhaust (standard)	internal
(optional) (female)	1/2 - 14 N.P.T.F. - 1
Weight	
PD03P-XDS-XXX	4.16 lbs (1.89 kgs)
PD03P-XES-XXX	4.26 lbs (1.93 kgs)
PD03P-XKS-XXX	4.50 lbs (2.04 kgs)
PD03P-XLS-XXX	4.62 lbs (2.10 kgs)
PD03P-XPS-XXX	3.44 lbs (1.56 kgs)
PD03P-XRS-XXX	3.50 lbs (1.59 kgs)
Air Section Service Kit	637428
Fluid Section Service Kit	637429-XX

PD03P-XXS-X ☒ ☒
637429 - ☒ ☒

Diaphragm Material
Ball Material

EXAMPLE: Model #PD03P-ARS-SAA
Fluid Section Service Kit is 637429-AA

PERFORMANCE

Air Inlet Pressure Range	10 - 100 p.s.i. (0.69 - 6.9 bar)
Maximum Material Inlet Pressure	10 p.s.i. (0.69 bar)
Fluid Outlet Pressure Range	10 - 100 p.s.i. (0.69 - 6.9 bar)
Maximum Flow Rate (flooded inlet)	10.6 g.p.m. (40.1 l.p.m.)
Displacement / Cycle @ 100 p.s.i.	0.022 gal. (0.083 lit.)
Maximum Particle Size	1/16" dia. (1.6 mm)
Maximum Temperature Limits (diaphragm / ball / seat material)	
Acetal	10° to 180° F (-12° to 82° C)
Hytrel	-20° to 150° F (-29° to 66° C)
Polypropylene	35° to 150° F (2° to 66° C)
Kynar PVDF	10° to 200° F (-12° to 93° C)
Santoprene	-40° to 225° F (-40° to 107° C)
Teflon PTFE	40° to 225° F (4° to 107° C)
Viton	-40° to 350° F (-40° to 177° C)
Noise Level @ 70 p.s.i. - 60 c.p.m.	72.7 db(A) ^①

Notes:

① The pump sound pressure level has been updated to an Equivalent Continuous Sound Level (L_{Aeq}) to meet the intent of ANSI S1. 13-1971, CAGI-PNEUROP S5.1 using four microphone locations.

ACCESSORIES:

66073-1 Air Line Connection Kit
67388 Wall Mount Bracket Assembly
93110 Muffler
637438 Ported Exhaust Kit

PERFORMANCE CURVES

PD03P-XXS-XXX 3/8" NON-METALLIC DIAPHRAGM PUMP

