

Square Body fuse accessories

Fixed center fuse blocks for DIN 43653 fuses



Sizes 1* to 3

Catalog no.	Max rated voltage	Max fuse amp rating	Center distance (mm)
170H3003	1000	630	80
170H3004†	1000	1250	80
170H3005	1400	630	110
170H3006†	1400	1250	110


† Fuses with ratings higher than 1250 A can be used with 170H3004 or 170H3006 if the maximum load current is derated according to this table.

Fuse amp rating	Max. amp load in fuse block
1400	1325
1500	1400
1600	1500
1800	1650
2000	1800




Dimensions — mm

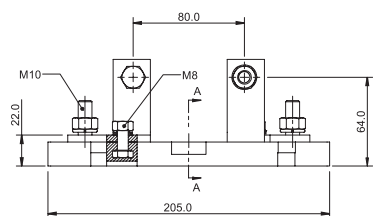


SECTION A-A

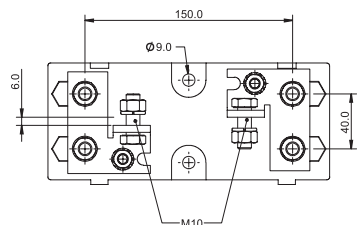




170H3003

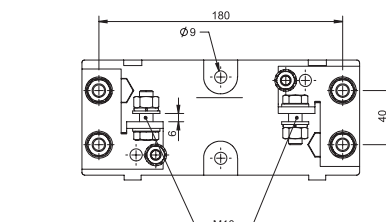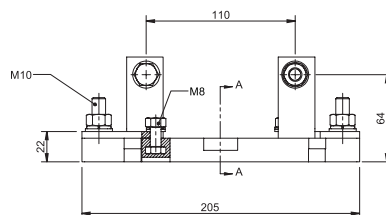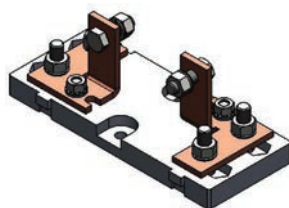


170H3005






SECTION A-A

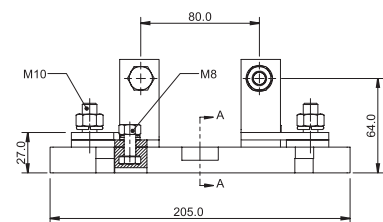


SECTION A-A

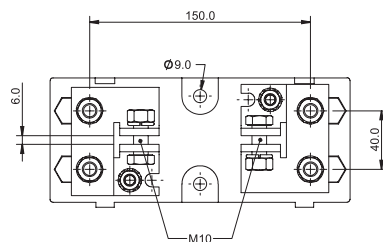

170H3004

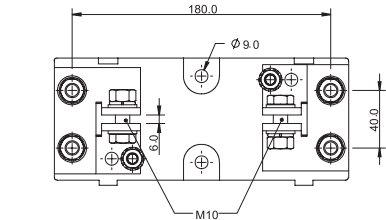

170H3006

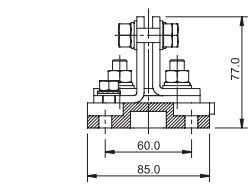

SECTION A-A

